

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015490 A1

(51) International Patent Classification⁷: **G02F 1/13357**,
1/1333

(74) Agent: **PARK, Young-Woo**; 5F, Seil Building, #727-13,
Yoksam-dong, Gangnam-gu, 135-921 Seoul (KR).

(21) International Application Number:
PCT/KR2002/002485

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
30 December 2002 (30.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2002-0047716 13 August 2002 (13.08.2002) KR

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **SAM-
SUNG ELECTRONICS CO., LTD.** [KR/KR]; 416,
Maetan-dong, Paldal-gu, Suwon-si, 442-742 Gyeonggi-do
(KR).

Published:


— with international search report

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **CHO, Chun-Hyun**
[KR/KR]; 107-705 Doosan Donga Apt., Gwonseon-dong,
Gwonseon-gu, Suwon-si, 441-390 Gyeonggi-do (KR).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: OPTICAL MEMBER, BACKLIGHT ASSEMBLY AND LIQUID CRYSTAL DISPLAY DEVICE USING THE SAME

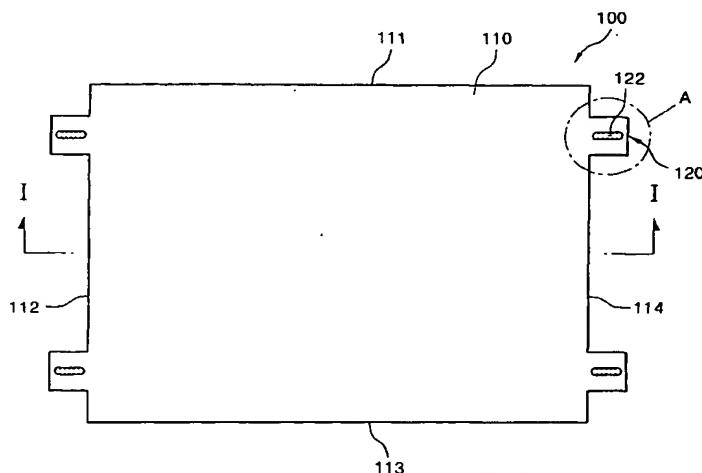

(57) Abstract: Disclosed are an optical member (100), a backlight assembly (500) and a liquid crystal display device (800) using the optical member. The optical member (100) includes an optical body (110) and a first fixing part (120). The optical body varies optical characteristic of first light incident into thereto to exit a second light. The first fixing part (120) is protruded from at least one side face of the optical body (110), and including a fixing hole (122) and a vibration attenuating means (124). The fixing hole (122) is elongated in a main expansion direction of the optical body (110), and the vibration attenuating means (124) is formed on an inner of the fixing hole to attenuate external vibration applied to the optical body (110). The fixing hole (122) allows movement of the optical member (100) in accordance with expansion of the optical member (100) caused by heat, thereby preventing wrinkles from being created on the optical body. The vibration attenuating member (124) prevents the optical body from being scratched.

WO 2004/015490 A1